


Specification:

- * Ider for Industrial or Commercial use
- * Screw mount
- * Screw mount, Cable available
- * Private labeling on request
- * Switches and magnets are available seperately
- * Colors: White, Brown, Grey
- * MCR-2101 UL & CUL listed
- * Safety approvals:

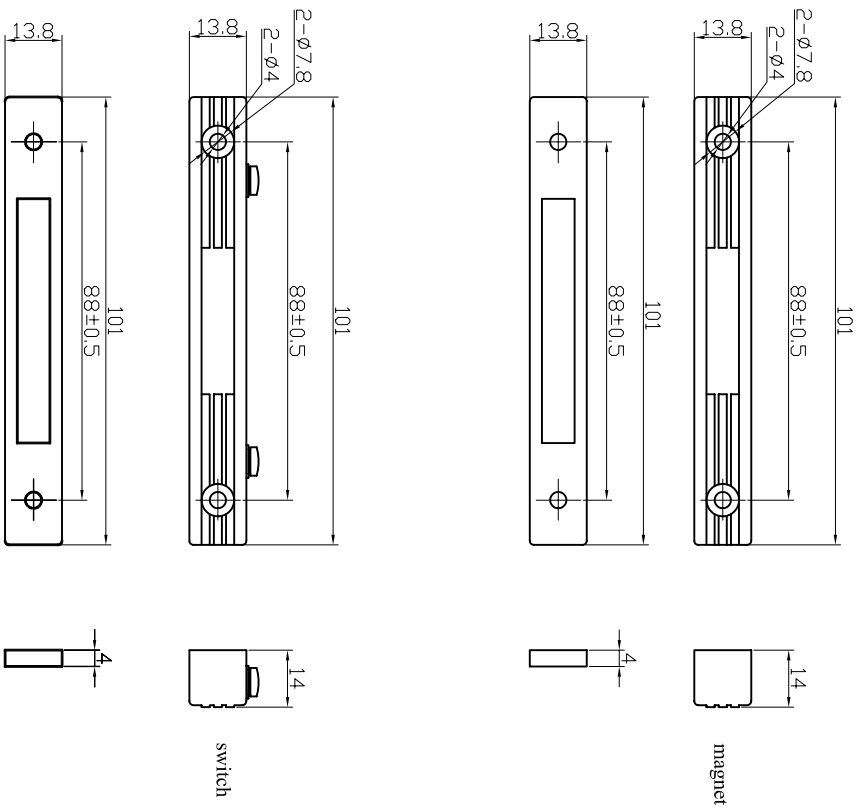

Part Number	Loop Type	Reed Form	Gap [Inch(mm)]	Maximum Initial Contact Resistance (ohm)	Maximum Contact Rating (w)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
MCR-4102(P)	Closed	N/O	2 1/2 (.65)	0.150	10	100	0.5
MCR-4102A(P)	Open	N/C	2 1/ (.65)	0.150	3	30	0.2

DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT http://www.dswbrand.com	
Magnetic Contacts	
MCS-4102	
E4.840.008	
No.	DESCRIPTION
DATE	DATE
APPROVED	APPROVALS
CHECKED	DATE
APPROVED	DATE
UNIT	DWG. NO.
SCALE	SHEET
NOT TO SCALE	VER. 1.0